

Veneer Stone



Ledgestone Collection

Technical Guide

Inspired by Native Australian Stone



Contents

Colour Selection	02
Gallery	04
Benefits	06
Product Specification	08
Installation Guide	10

Choose Your


Colour



LIMESTONE



TRAVERTINE



DUNE



EARTH




SANDSTONE



**NATURAL
GREY**



GRANITE



SLATE

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.



SLATE

Ledgestone

Taking direct inspiration from stone seen in nature, our Ledgestone Collection is a must have for those seeking a blend of classical and modern design elements. The symmetrical nature of the stone perfectly compliments the modern Architectural movements. The design of the stone itself provides a seamless interlocking mechanism for easy installation.



NATURAL GREY



SANDSTONE

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.



Scan Me

For more project images visit our image library

EARTH

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.

Benefits



TRAVERTINE



Light Weight



Aesthetics



Highly Durable



Low Maintenance

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.



LIMESTONE

WHY CHOOSE VENEER STONE

- Ideal for commercial use
 - Architects Choice
- Corners and Capping available to suit all products
- Australian Made and Owned

Ledgestone offers the look of dry stacked stone which gives timeless beauty to any application, whether it's your house facade, office feature wall, fireplace, poolside feature or general landscaping. Ledgestone's interlocking panel allows for user friendly installation with the most complex of designs. We carefully blend crushed sandstone with less than 1% natural colour pigments to create the distinctive look and relaxed feel of solid natural stone walling with a fraction of the weight. All products come in tile form and range from 20mm - 30mm in thickness. Capping is available for all products and is highly recommended for use.



The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.

LEDGESTONE

All weights and measurements are approximate.

Order Multiples Bodies:	43 - 49 kg/m ²	per Box 0.6 m ² 29.4 kg	per pallet 21.6 m ² 1,058.4 kg
-------------------------	---------------------------	---	--

Average Thickness: 20mm - 30mm

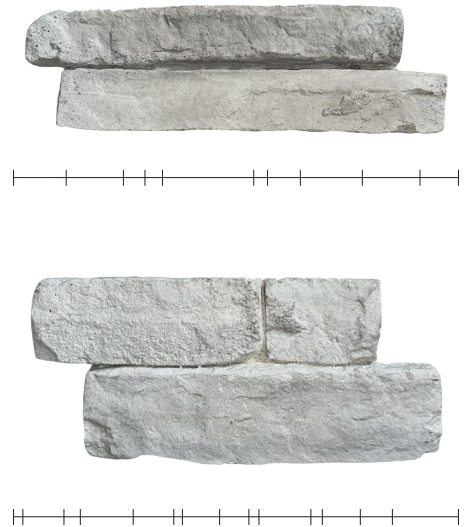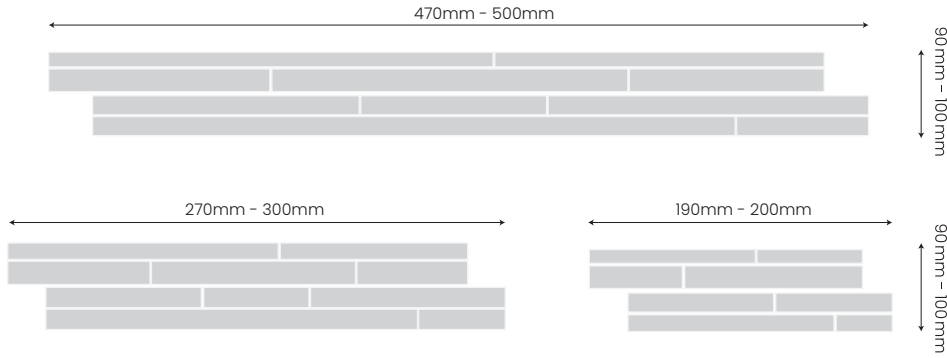

Capping



LIMESTONE



TRAVERTINE



EARTH



SLATE



SANDSTONE



**NATURAL
GREY**



GRANITE





BLUESTONE

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.

Estimating Stone Required


When installing with dry joints (dry stacked) add an extra 10-15% to allow for extra cuts and wastage.

BODIES: Calculate the total surface area by square metre.

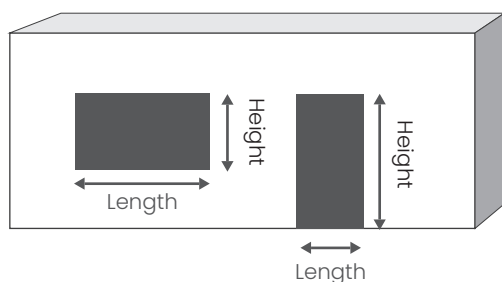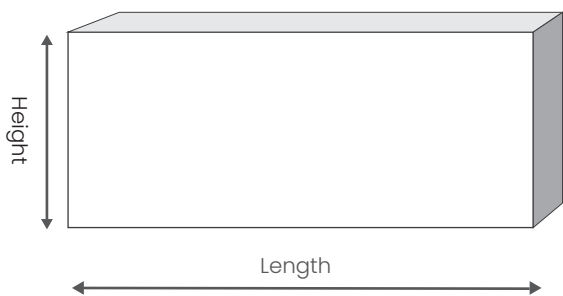

CORNERS: Calculate the lineal metres of corner stones required by measuring all external corners from top to bottom.

Please note 1 lineal metre of corners equates to approximately 0.2 m² of surface area (deductible off bodies).

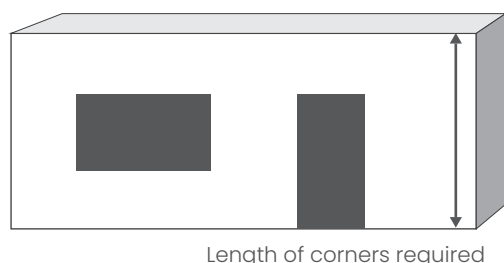

Random Shade Variation

Extreme colour and texture variation will occur from piece to piece and within each batch for a random look. The look of the final installation will be unique. Please review the range of products before making your final selection.

Approximate Weights

	Bodies
Ledgestone Range	43 - 49 kg/m ²

APPLICATION

Suitable for interior and exterior walls, Veneer Stone can be installed around fireplaces, though no closer than 20 cm to a naked flame. Veneer Stone can also be installed around wet areas, however, continued exposure to chlorine and other chemicals may eventually affect the colouration of the products. When frequently exposed to water, we recommend protection with Ven Seal Ultra WB sealer.



Veneer Stone estimation calculator
www.veneerstone.com.au/calculator

The product colours in this booklet are as accurate as current photography & printing techniques allow. We suggest you look at actual samples for a better idea and selection.


INSTALLATION

Important Note: Our LedgeStone collection has been designed to have irregular edges to give a rustic appeal. This will create small voids between some panels. If your application requires corners to be covered, apply these first. We suggest you prepare the wall by ensuring the colour of the wall is similar to the stone. This can be done by tinting the glue or mortar with an oxide. Check with your local glue supplier for warranty & terms.

Installation Tips:

- LedgeStone has been designed for dry stack installation/presentation. When applying the panels keep the joints as tight as possible to retain the natural dry stone look.
- If your application requires corners to be covered, apply these first.
- After the corner pieces have been applied, apply the stone panel's 1-2 layers at a time, working towards the centre.
- Colour, size and texture variation is an essential aspect of a natural looking stone wall. Select stone from different boxes and lay out across your job site to ensure you gain this look. The visual effect will be enhanced by an overall natural mixed presentation.

Sample Installation guide – (just like brick work) avoid straight vertical lines when placing the stone

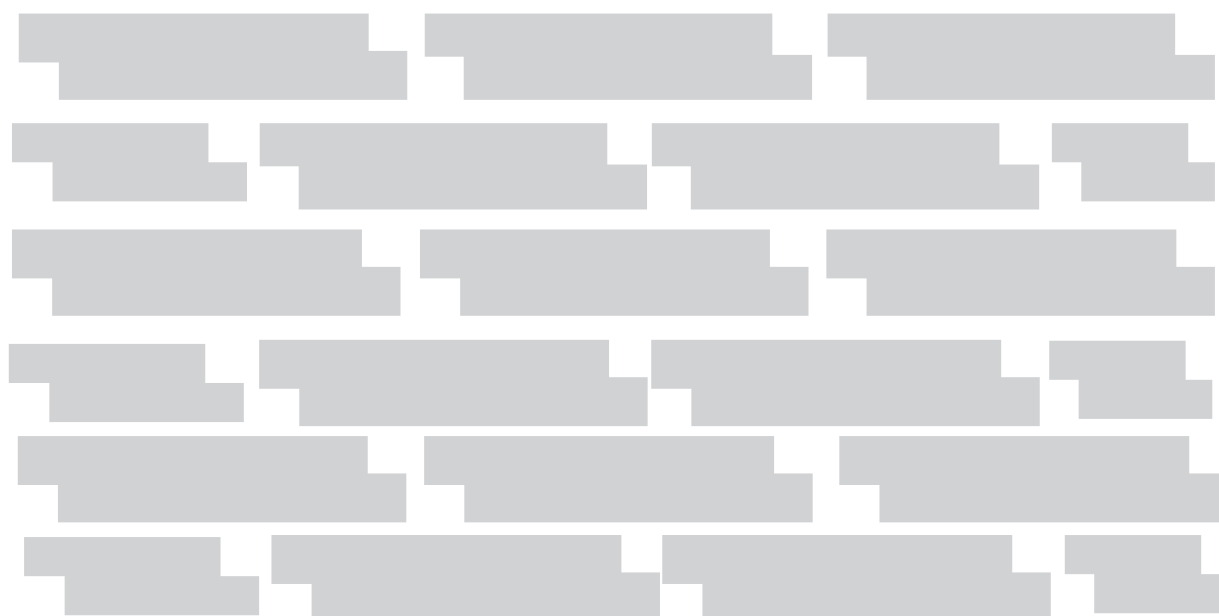

All bodies interlock around corners

Cutting the Stone Panels: The stone panels can be cut or trimmed using a wet saw, hammer & bolster, wide mouth nippers or angle grinder with diamond blade attached.

Sealing: To retain the original fresh quarried look we suggest sealing the stone. If you would like the stone to mellow slightly and gain the European look after years of harsh weathering don't seal the product.



CORNERS



| ALL BODIES
| INTERLOCK
| AROUND
| CORNERS

Contact Us



15 Technology Drive,
Appin, NSW 2560
Australia
Head Office

2/26 Egan Rd,
Dandenong, VIC 3175
Australia
VIC Warehouse

Darra Depot,
Brisbane, QLD
Australia
QLD Warehouse



/venerstone



1300 984 572
(02) 4606 4907



/venerstoneaustralia



venerstone.com.au